



FibaFuse Tape

Gyprock FibaFuse tape is an open-fibre, mould and mildew resistant 52mm glass mat tape designed for professional plasterers and renovators. FibaFuse is easy to cut and install by hand or with automatic taping tools.

Recommended Use

FibaFuse Tape is designed to be embedded in the first coat of a three coat jointing system. It is ideal for use with mould-resistant plasterboards such as the EC08 range, and is recommended for jointing in high-humidity and moisture-prone applications such as bathrooms and laundries. The open fibre structure of FibaFuse Tape makes it suitable for use with Pro-Repair 10 for fast repairs and jointing projects. To achieve the ultimate joint finish, FibaFuse tape should be used in conjunction with Gyprock Base Coats or Gyprock Multi-purpose Jointing Compounds.

Important

- Ensure all surfaces are free from dust and dirt.
- Always use clean tools.

FibaFuse Tape Specifications	
Feature	Description
Width	52mm
Length	76.2m
Product Manufacture	Gyprock FibaFuse tape is manufactured for CSR Gyprock by worldwide plasterboard specialist Saint-Gobain.



Product Features



Moisture Resistant

Suitable for wet areas



Strong

Strengthens joints



Automatic Taping Tools

Suitable for use in automatic taping tools

Plasterboard Finishing

Jointing and finishing of Gyprock plasterboard interior installations is to be carried out in accordance with **FIGURE 1** and **TABLE 1** in this document, and the following details, so as to provide a smooth surface for decorating. Stopping and external corner beads are to be applied to all edges subject to damage. A Level 4 Finish is generally the accepted level of finish for residential construction as detailed in AS/NZS2589.1 and is also recommended for commercial construction. This requires a three-coat system, consisting of:

- Tape and tape coat
- Second coat and
- Finish (or topping) coat.

FIGURE 1: SELECTING A LEVEL OF FINISH

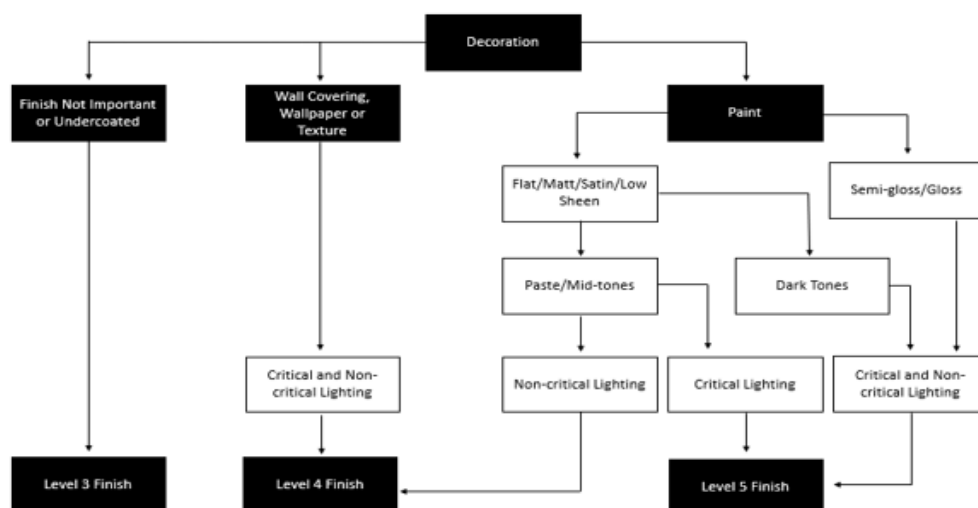


TABLE 1: JOINTING COMPOUND SELECTION – HAND OR MECHANICAL

Tape Coat Any of the following:		Second Coat Any of the following:		Finish Coat Any of the following:	
Product	Recoat Time	Product	Recoat Time	Product	Recoat Time
Base Coat 20*	35 mins	Base Coat 20*	35 mins	Jointmaster	24 hr
Base Coat 45*	60 mins	Base Coat 45*	60 mins	Ultra-Top	24 hr
Base Coat 60*	80mins	Base Coat 60*	80mins	Gold	24 hr
Base Coat 90*	120mins	Base Coat 90*	120mins	Easy-Finish	24 hr
Ultra-Base MR 60*	75 mins	Ultra-Base MR 60*	75 mins	Easy-Flow	24 hr
Easy Base	24 hr	Easy Base	24 hr	Less Mess Multi-Purpose	24 hr
Less Mess Multi-Purpose	24 hr	Less Mess Multi-Purpose	24 hr		
Easy- Flow	24 hr	Easy-Flow	24 hr		
Wet Area Base Coat	12-24 hr	Wet Area Base Coat	12-24 hr		

*Setting type compound. Do not use a setting compound over a drying type compound.
For protected exterior applications, use Wet Area Base Coat or Ultra-Base MR 60 for tape and second coat, followed by a Gyprock Finish Coat.



Application

1. Fill recess even and fully with compound
2. Bed in Gyprock FibaFuse tape centrally over the joint and cover lightly with compound. Apply at least 1mm thickness of compound under the tape.
3. Bed tapes to butt joints and internal corner angles. Apply at least 1mm thickness of compound under the tape.
4. Cover all metal bead corner beads and fastener heads.
5. Allow compound to set and harden before recoating.

Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

Health and Safety

Refer to the Safety Data Sheet for this product which is available from www.gyprock.com.au or contact:

CSR Gyprock

Trinity 3, 39 Delhi Rd, North Ryde NSW 2113

Australia Phone: **131 744**

New Zealand Phone: **0800 277 123**

Resources

For further information on this product please visit www.gyprock.com.au or refer to the Gyprock Red Book. For technical support, contact:

DESIGNLINK[™]

PHONE: 1800 621 117

Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto www.gyprock.com.au/warranty, or contact us



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.